

National Examinations – December 2009

07-Mec-A4, Design & Manufacture of Machine Elements

3 Hours Duration

Notes:

1. If doubt exists as to the interpretation of any question, the candidate is urged to submit with the answer paper, a clear statement of any assumptions made.
2. This is an open book examination. Any non-communication calculator is permitted.
3. There are 8 questions on the following 6 pages, divided into Part A and Part B. Answer three (3) questions from Part A and two (2) questions from Part B. Five (5) questions constitute a complete paper. Only the first five questions, as they appear in your answer book will be marked. Clearly cross off any question you do not want marked.
4. All questions are of equal mark value (20%).

PART A: Choose any three (3) problems from part A.

Q1

- (a) Describe the process shown in Figure S1.
- (b) What are the advantages of this process?
- (c) Industrial implementation of this process has been difficult, why?

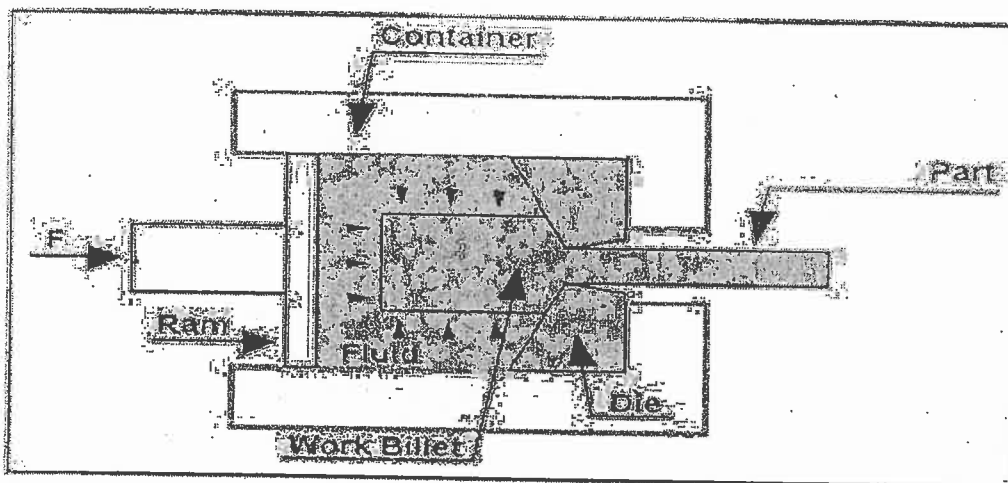


Fig. S1

Q2

The Figure S2 shows the setup for fine blanking.

- (a) Describe the process,
- (b) Describe the main feature of sheet metal parts produced using this process ,
- (c) How is this feature achieved ?

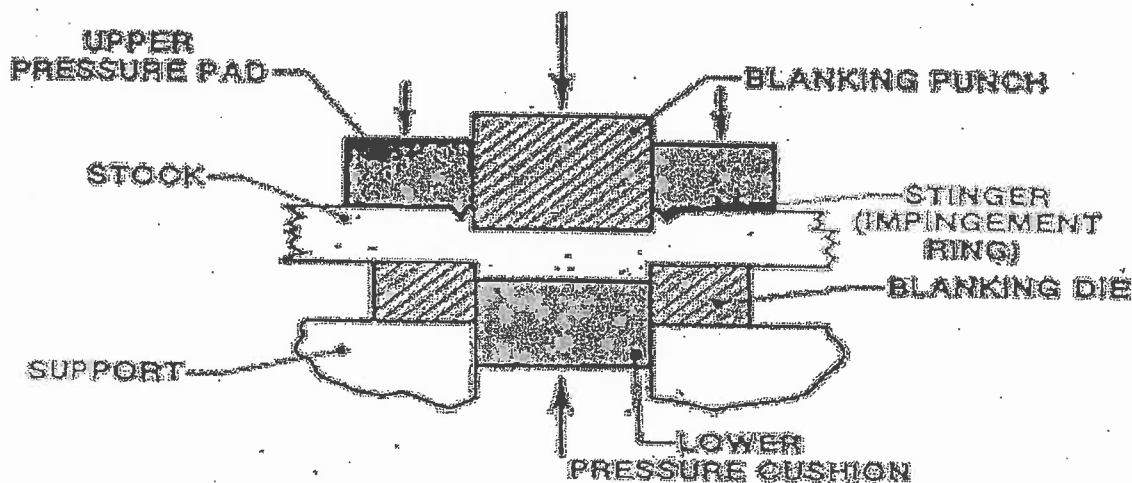


Fig. S2

Q3

A lever-shaped component is made by bending a blanked form. In the middle of a large production run, it is noted that a number of parts fracture, partially or fully, during bending. (a) Suggest the most likely cause, assuming that all blanks are sheared from the same batch of material, and suggest remedies in the (b) blanking and (c) bending operation.

Q4

A cast iron, T-type fitting is being produced for the oil drilling industry, using an air-set or no-bake sand for both the mold and the core. Figure S3 shows a cross section of the mold with the core in place (Figure S3.a), and a cross section of the finished casting (Figure S3.b). Note that there are several significant defects. Gas bubbles are observed at one location in the base of the tee. A penetration defect is observed near the bottom of the inside diameter, and there is an enlargement of the casting at location "C".

- Why are these gas bubbles present only at the location noted?
- What factors may have caused the penetration defect?
- What factors led to the enlargement of the casting at point "C"?

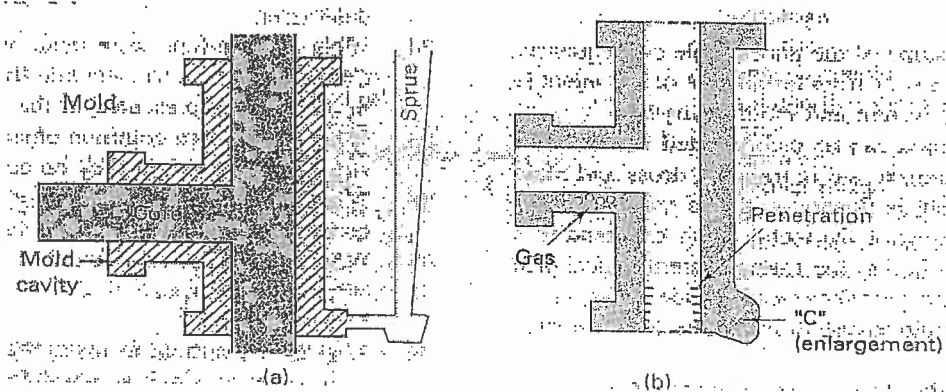


Fig. S3

Q5

The Figure S4 shows a crank loaded by a force $F=190$ lbf which causes twisting and bending of the $\frac{3}{4}$ -in-diameter shaft fixed to a support at the origin of the reference system. The material of the shaft AB is hot-rolled AISI 1 steel (yield strength $S_y = 32$ kpsi and tensile strength $S_{ut} = 58$ kpsi). Using the maximum-shear-stress theory, find the factor of safety based on the stress at point A.

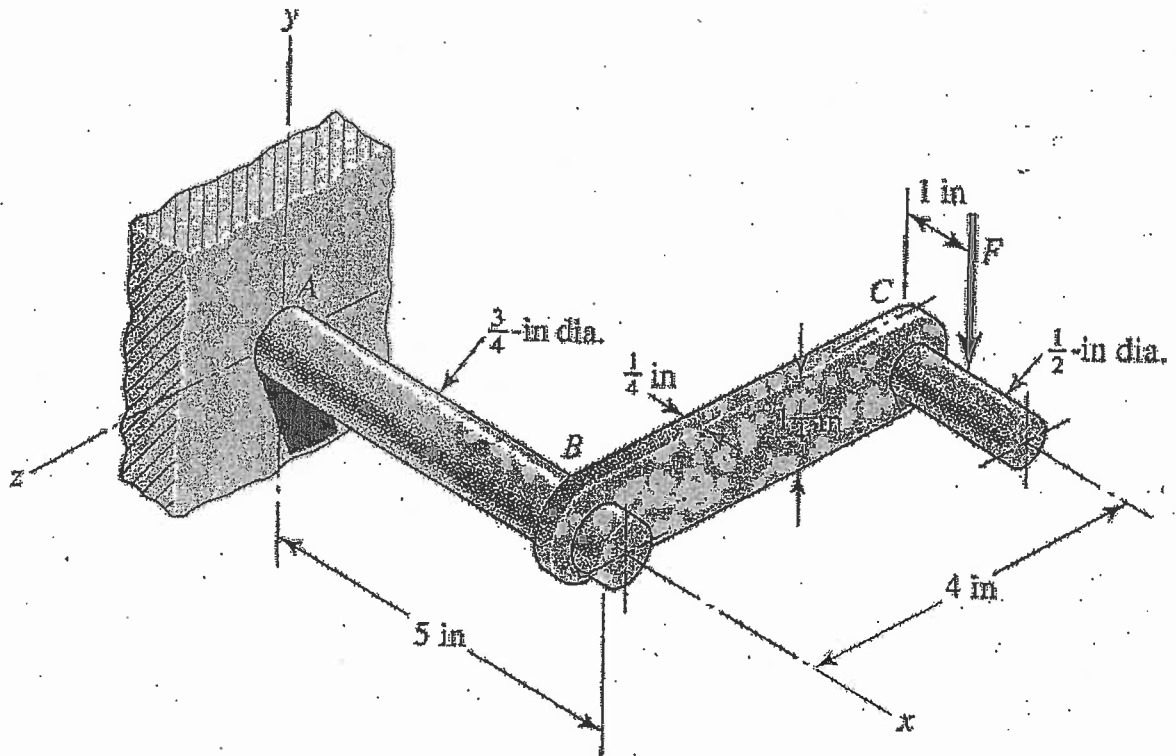


Fig. S4

Q6

The rotating solid steel shaft in Figure S5 is simply supported by bearings at points B and C and is driven by a gear (not shown) which meshes with the spur gear at D, which has a 6-in pitch diameter. The force F from the drive gear acts at a pressure angle of 20 degrees. The shaft transmits a torque to point A of $T_A = 3000 \text{ lbf}\cdot\text{in}$. The shaft is machined from steel with $S_y = 60 \text{ kpsi}$ and $s_{ut} = 80 \text{ kpsi}$. Using a factor of safety of 2.5, determine the minimum allowable diameter of the 10 in section of the shaft based on (a) a static yield analysis using the distortion energy theory and (b) a fatigue-failure analysis. Assume sharp fillet radii at the bearing shoulders for estimating stress concentration factors.

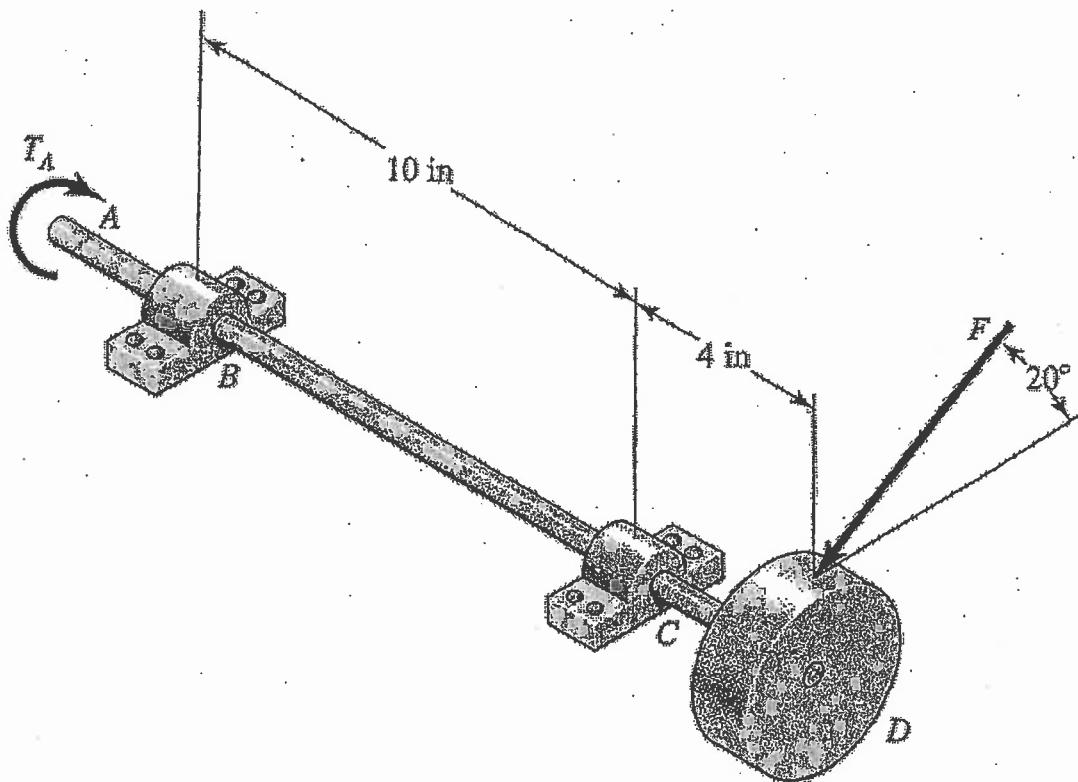


Fig. S5

Q7

A vertical channel 152 x 76 has a cantilever beam bolted to it as shown in Figure S6. The channel is hot-rolled AISI 1006 steel. The bar is of hot-rolled AISI 1015 steel. The shoulder bolts are M12 x 1.75 ISO 5.8. For a design factor of 2.8, find the safe force F that can be applied to the cantilever.

Use the following information:

Bolts; $S_p = 380$ Mpa, $S_y = 420$ Mpa

Channel: $t = 6.4$ mm, $S_y = 170$ Mpa

Cantilever: $S_y = 190$ MPa

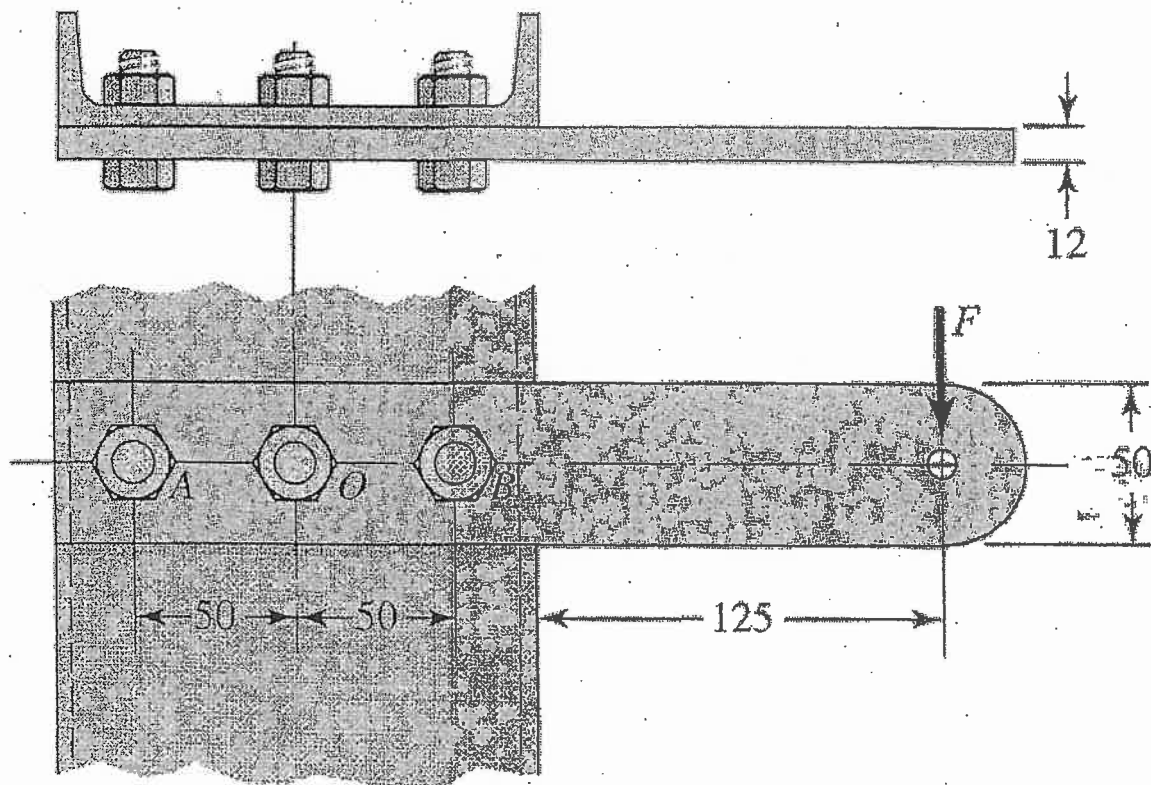


Fig. S6

- Q8
- Without bracing, a machinist can exert only about 100 lbf on a wrench or tool handle. The lever shown in the Figure S7 has $t = 0.5$ in and $w = 2$ in. We wish to specify the fillet-weld size to secure the lever to the tubular part at A. Both parts are of steel, and the shear stress in the weld throat should not exceed 3000 psi. Find a safe weld size.

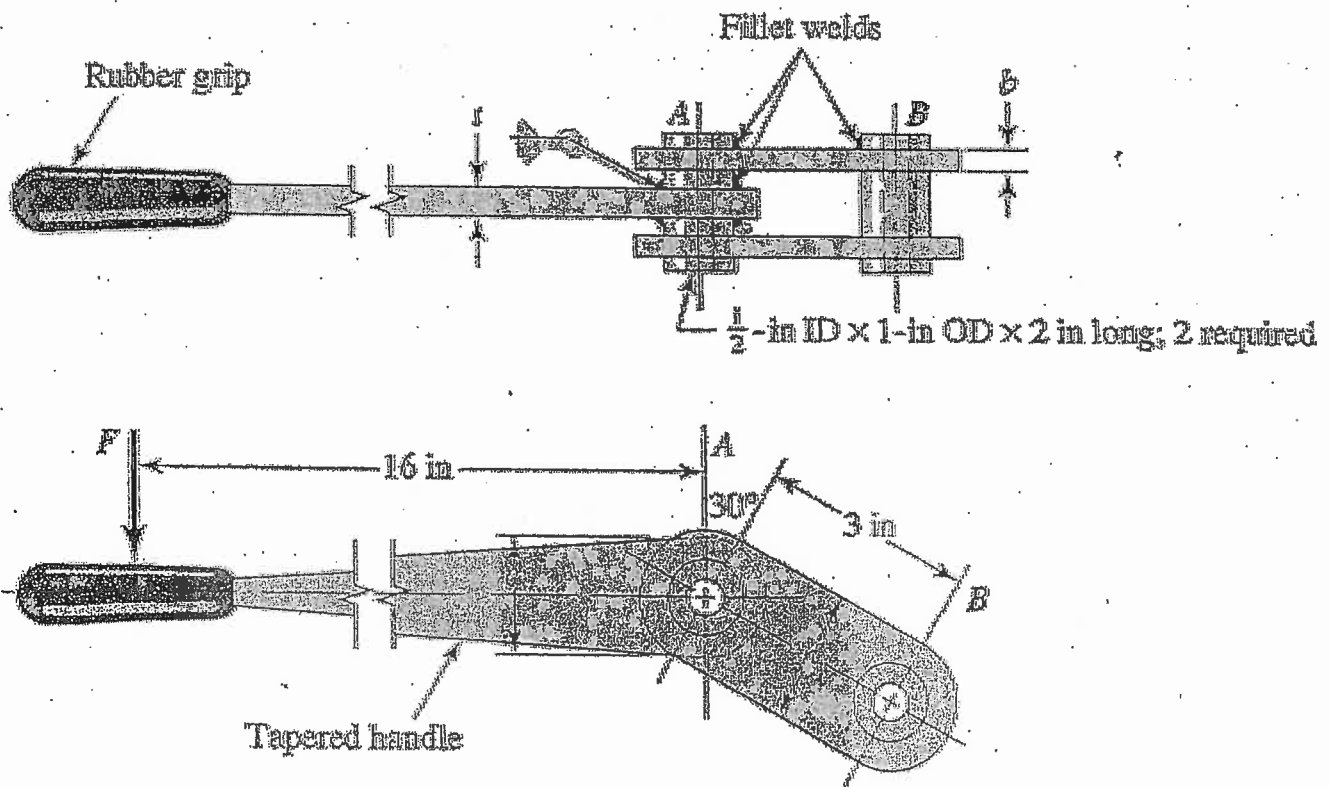


Fig. S7